
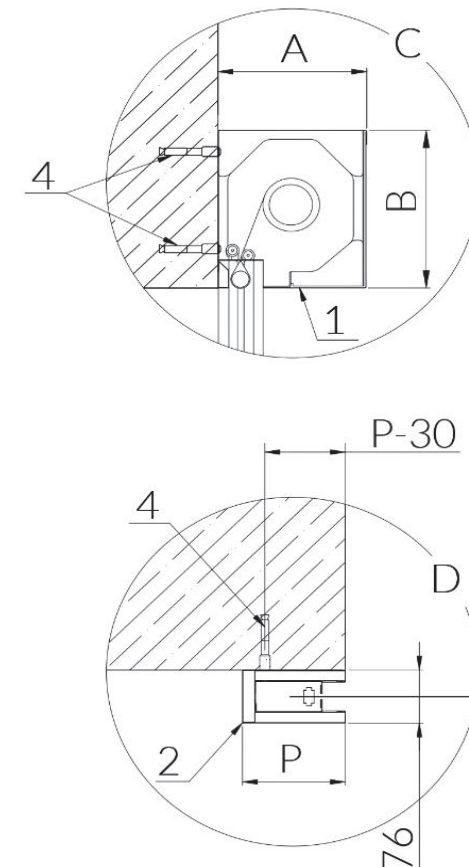


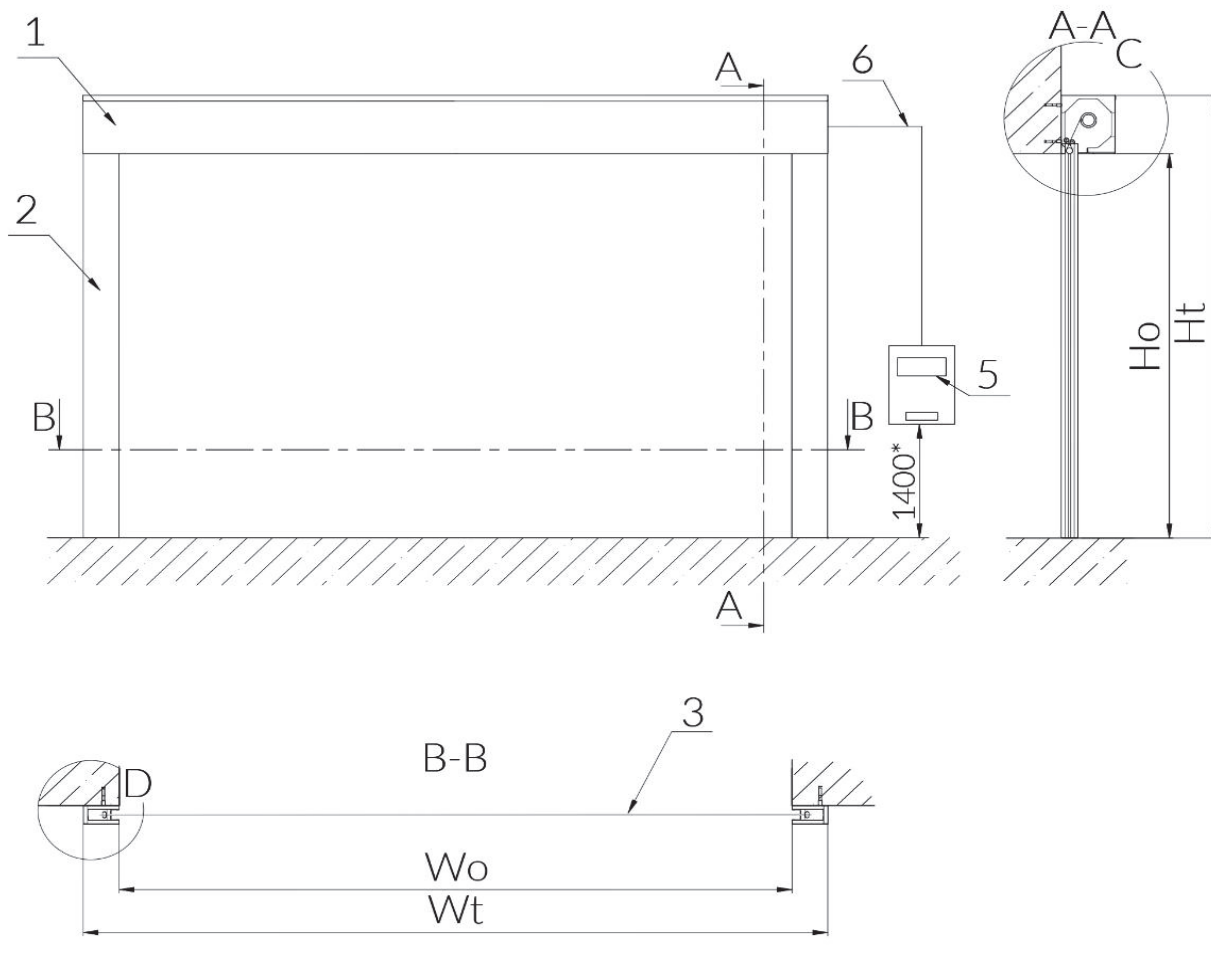

Durability of self-closing - against degradation: -C0

		Wo	Ho	Wt	Ht	A	B	DRIVE TYPE	DRIVE POSITION	P	WEIGHT
		3000	3000	3230	3350	315	350	TUBULAR MOTOR 24V BECKER	RIGHT SIDE	115	273

*recommended mounting dimensions of the control unit

Page 1/1

The wall surface for door installation must be even (smooth). Otherwise, the client is obliged to align the assembly surface prior to installation.

The gate must be installed on all prepared mounting holes. Number of required anchors: M8 (20pcs), M12 (6pcs)

The documentation prepared by the **manufacturer** company is protected by copyright. The manufacturer has the right to change the dimensions of the building during the execution of the order. The drawings are for illustration only. When ordering, the manufacturer reserves the right to choose the form of product legalization

1. Shaft housing
2. Guides
3. Coat
4. Mounting anchors
5. Control unit 230
6. Power cord

- Wo - opening width
Ho - opening height
Wt - total width
Ht - total height
A - housing depth
B - housing height
P - width of the guide

Structural load-bearing calculations to match the weight of the gate are the responsibility of the investor

 BRANDPORTAR SWEDEN Fire and Security Doors	CLASS/TYPE		GSF KPR SMART EI 60			
	NOTES		WALL MONTAGE, TUBULAR MOTOR			
PRODUCT NAME		OFFER NUMBER	DEVELOPED	DATE	REVISION	VERSION
FIRE CURTAIN GSF KPR SMART EI		3120/25	DS.	30.07.2025		V.3